


SSR-60 / SSR-74



REAPER[®]

ATTACHMENTS

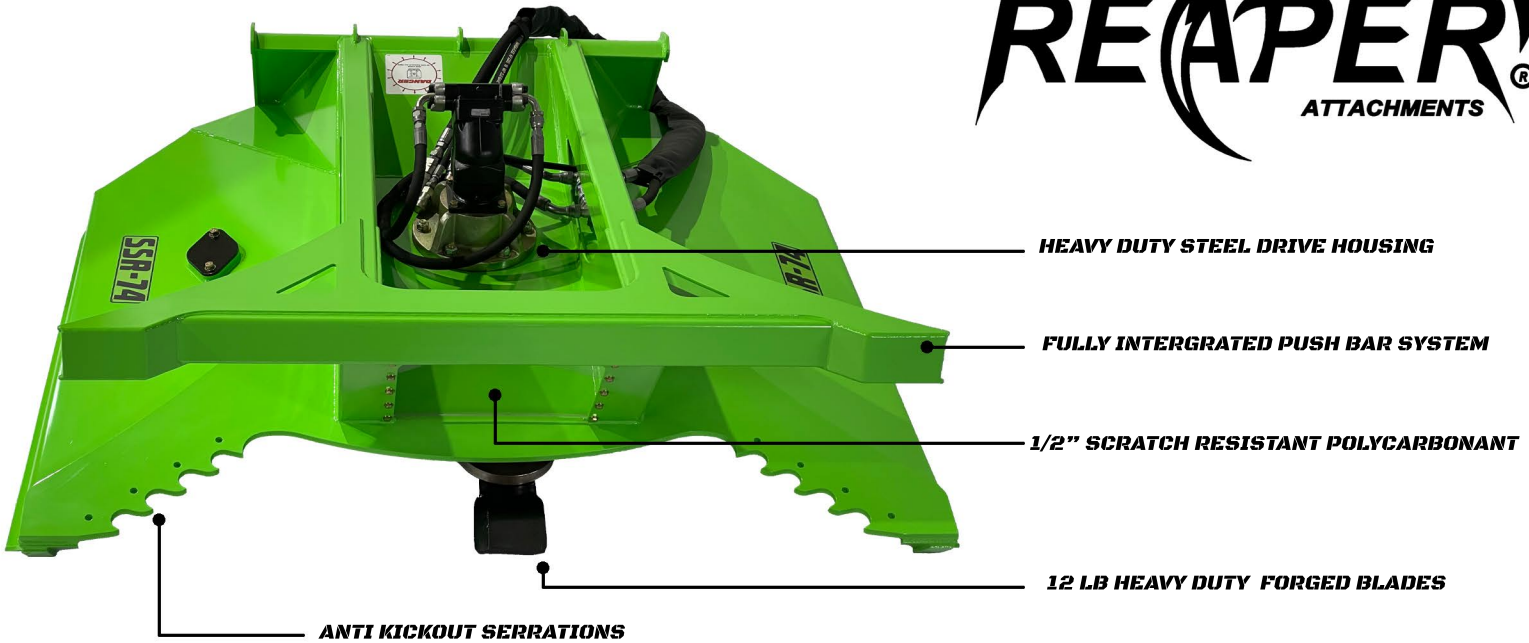

***OPTIONAL PISTON MOTOR UPGRADE**

REMOVABLE ACCESS COVER



***PISTON MOTOR REQUIRED ABOVE 3500 PSI**

| MACHINE SPECIFICATIONS: | SSR-60 | | SSR-74 | |
|---|----------------------------------|------------------|----------------------------|------------------|
| | WITHOUT GATE | WITH GATE | WITHOUT GATE | WITH GATE |
| WEIGHT | 1339 LBS. | 1487 LBS. | 1816 LBS. | 2016 LBS. |
| OVER ALL WIDTH | | 64" | | 80" |
| OVERALL DEPTH | | 67" | | 83.5" |
| CUTTER WIDTH | | 60" | | 74" |
| HEIGHT | | 27" | | 26" |
| HYDRAULIC GEAR MOTOR OPTIONS (STANDARD) | 20-40 GPM @ 3500PSI MAX | | | |
| HYDRAULIC PISTON MOTOR OPTIONS (UPGRADE) | 32-40 GPM @ 5000PSI MAX | | | |
| DIRECT DRIVE SPINDLE | 6" SOLID 4140HT STEEL | | | |
| BLADE CARRIER | 1" T-1 CNC MACHINED STEEL | | | |
| CUT CAPACITY | 8"+ THICK MATERIAL | | 12"+ THICK MATERIAL | |

REAPERATTACHMENTS.COM
SALES@REAPERATTACHMENTS.COM
CONTACT US TODAY : 1-833-526-6380

MADE IN THE USA